

## **A CONDITION MONITORING SYSTEM TO MEASURE THE CUTTING FORCE USING DATA ACQUISITION SYSTEM**

**Anil A. Sequeira**

Department of Mechanical Engineering  
St. Joseph Engineering College  
Vomanjoor, Karnataka, India-575021  
[sequeiraanil@yahoo.com](mailto:sequeiraanil@yahoo.com)

### **ABSTRACT**

There are number of different conditions which lead to the installation of a monitoring system in an industrial manufacturing process. Cutting parameters is one of the conditions have largest influence on Tool wear and breakage. This paper presents the methodology of genetic optimization for the on-line optimization of the cutting parameters as an approach to build systematic design of condition monitoring system and the signal processing for the detection of fault conditions for milling processes.

**Keywords:** Monitoring, Acquisition, Cutting Force and Milling

### **1. INTRODUCTION**

The importance of monitoring cutting force in milling has been well recognized in machine tool community. The cutting force is the most important characteristic variable to be monitored in cutting processes because the changes of the cutting force is directly related to the cutting conditions[1]

In particular real-time and online information of cutting forces is very useful for tool wear prediction, tool breakage and other malfunction inspection. Signal processing, data processing techniques have been successfully implemented in industrial application. The paper presents the approach for cutting force measurement system for the face milling using three basic components the first, sensors for the cutting force measurement, Second, the data acquisition system and third, Lab VIEW software. Piezoelectric dynamometer is generally used as a sensor cutting force measurement. The cutting process input variables to the system is by means of dynamometers and converts the data into numerical values. In this paper the method is based on the interrupted cutting of a specially designed work piece that provides a strong broadband excitation. The distorted dynamic behavior is studied with various characteristics under normal machining operation. The three components of the exciting force and the acceleration of the gravity centre of the dynamometer cover plate are measured simultaneously. The measured values are delivered to the computer program through the data acquisition system. The data obtained from the acquisition system, are a basis for the optimization of the cutting parameters of the machining operation.

## 2. MONITORING SYSTEM

The cutting force is one of the most important characteristic variables to be monitored in the cutting process, because the change of cutting force is directly related to the cutting condition [2]. In particular, real-time and online information of the cutting force is very useful for the tool wear prediction, breakage detection, and the ability of the system to identify any abnormalities and respond, on-line, with an appropriate action. Some researchers, therefore, have developed various monitoring systems for the cutting process using the measured cutting forces. Thus, these monitoring systems are widely applied in a factory environment. Automation of manufacturing systems for condition monitoring of machine tools and processes for the improving of the quality of products, eliminating inspection, and manufacturing productivity are the most important demands from the present world market [3].

The objectives of this paper are to design a system for the cutting forces measuring in milling. This system will help in monitoring the tool wear and tool breakage.[4] This system also result in reducing the cost and complexity of the condition monitoring system and the number of sensors required for fault identification of milling cutters without compromising the system's ability to detect cutter faults .The force generated during machining process is an important parameter, which reflects the machining conditions. The most frequent approach taken to milling process monitoring is to attach sensors to the machine and then monitor the signals obtained from these sensors. With a cutting force acquisition system, the cutting process can be monitored easily. The data acquisition system frequently commences with experiments using a table force dynamometer which quantifies the actual force exerted on the milling tool during the cutting process. Using different cutting tools and different cutting conditions, the tool which generates the smaller force is expected to be the more effective in cutting. With this system, different tools of different mechanical properties can be tried out on the same workpiece, enabling a suitable cutting tool to be chosen. This system also can be used for other operations and faults with minimal modification.

A condition monitoring system, as shown in Figure 1 consists of sensors, signal processing stages, and decision making systems to interpret the sensory information and to decide on the essential corrective action.

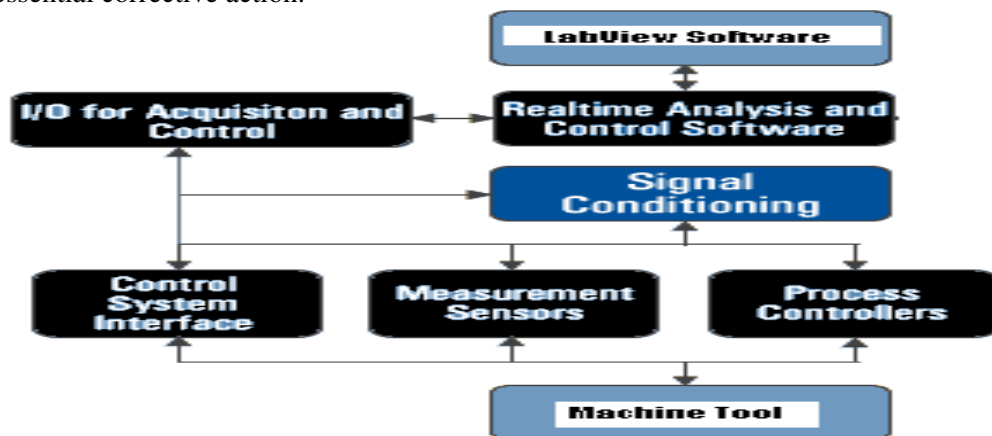


Figure 1 Monitoring system

### **3. SYSTEM FOR THE CUTTING FORCE MEASUREMENT**

Force measurements are commonly carried out using a table mounted dynamometer during machining operation [5]. The dynamometer is clamped between the workpiece and the table or pallet. These dynamometers measure the cutting force in three mutually perpendicular directions X, Y and Z axis.

The system for the cutting force measurement comprises three modules, the results measured cutting forces, the data acquisition system and LabVIEW software. The data acquisition system used in this experimental model consists of dynamometer, fixture, hardware and software module.

The dynamometer system is composed of a dynamometer (Kister Model 9255), a multichannel charge amplifier (Kister Model 5001) and their connecting cable. When the tool is cutting the material, the force will be applied to the dynamometer through the cutting tool. The piezoelectric quartz in the dynamometer will be strained and an electric charge will be generated. The electric charge is then transmitted to the multi-channel charge amplifier through the connecting cable. The charge is then amplified using the multi-channel charge amplifier. In the multi-channel charge amplifier, different parameters can be adjusted so that the required resolution can be achieved. Essentially, at the output of the amplifier, the voltage will correspond to the force depending on the parameters set in the charge amplifier. The interface hardware module consists of a connecting plan block, analogue signal conditioning modules and a 16 channel A/D interface board (PC-MIO-16E-4). In the A/D board, the analogue signal will be transformed into a digital signal so that the LabVIEW software is able to read and receive the data. The voltages will then be converted into forces in X, Y and Z directions using the LabVIEW program. The LabVIEW data acquisition module is based on a PC computer, and is a general-purpose programming system with an extensive library of functions and subroutines for any programming task. It also contains an application specific library for data acquisition, serial instrument control, data analysis, data presentation, and data storage [6].

### **4. SIGNAL ANALYSIS**

There are number of methods developed for the signal analysis, the method used here is of some importance. Sometimes it looks as if some researchers think that if the measured signal is acceptable then it would be possible with a clever diagnostic tool to solve everything. Unfortunately this is not the case. The diagnosis always needs to be based on reliable and meaningful information and this is where signal analysis can help by providing effective features as a basis for diagnosis. The role of signal analysis could be described as a tool which tries to pick up the meaningful information out of the mass of information. In many cases the dilemma is that the more sophisticated methods need a lot of raw signals and it takes time to collect this raw material and it also takes time to perform the calculations. Consequently, many of the most sophisticated methods are not suitable, e.g. for tool breakage monitoring [7]. In addition, the results with a sophisticated analysis function are influenced by the cutting process, i.e. workpiece material, type of tool, feeding and cutting speed which makes the diagnosis more demanding. On the other hand, very simplistic methods are fast to use and often not that sensitive to changes in cutting conditions.

### **5. APPLICATIONS**

The continuing development of efficient manufacturing systems requires a greater degree of process optimization. Tool wear and tool breakage problems constantly disrupt these processes. On-line tool condition monitoring strategies utilizing multi-signal inputs to monitor and diagnose

tool condition are being researched and should be encouraged. The use of artificial intelligence, in particular neural networks, seems to be the way forward in the handling of both a multi-signal and a multi-model strategy. The earlier research into cutting process monitoring is still valid but now many of the methods can be combined into one comprehensive strategy. To do so it is important that established researchers who are familiar with the nature of the cutting process and those who operate within the area of intelligent systems engineering come together and meet with industrial machine tool users and manufacturers to develop a strategy for the advancement in this area. Overall there seems to be the possibility that the next generation of monitoring tools can be engineered to fit into the control strategies used in the design of advanced machine tools. As such, truly intelligent monitoring systems will be capable of working with the machine to continuously optimize the cutting process. In this area the most promising approaches would seem to be those which will utilize, and indeed share, the signals used to control the elements of the machine tool as the basis of process monitoring. Work in this field is continuing to provide more reliable, robust and responsive tool condition monitoring systems which are needed in modern manufacturing systems. They are much needed, and must be developed if truly automated manufacturing is to develop further

## 6. CONCLUSIONS

An Easy and improved design of condition monitoring of cutting parameter is been achieved. This paper also considers the application of condition monitoring techniques to the detection of cutting tool wear and breakage during the milling process. Established approaches to the problem are considered and their application to the next generation of monitoring systems is discussed. A many approaches are identified as being key to the industrial application of operational tool monitoring systems. Multiple sensor systems, which use a wide range of sensors with an increasing level of intelligence, are seen as providing long-term benefits, particularly in the field of tool wear monitoring. Such systems are being developed by a number of researchers in this area. The second approach integrates the control signals used by the machine controller into a process monitoring system which is capable of detecting tool breakage. Initial findings mainly under laboratory conditions; indicate that these approaches can be of major benefit. It is finally argued that a combination of these approaches will ultimately lead to robust systems which can operate in an industrial environment.

## REFERENCES

1. M. Weck, "Machine Diagnostics in automated production," J. Manuf. Syst. Vol,2, no 2, pp 101-106, 1983.
2. J. Tlusty and G. C. Andrew," A critical review of sensors for unmanned machining," Ann CIRP, Vol 32, no 2, pp 611-622, 1983
3. A. Al-Habaibeh and N. Gindy, A new approach for systematic design of condition monitoring systems for milling processes, Journal of Material Processing Technology, Vol 107, pp 243-251, 2000
4. J.H. Tarn and M. Tomizuka, Online monitoring of tool and cutting conditions in milling, ASME J. of Eng. For Industries, Vol 111, pp 149-157, 1989
5. T. Moriwaki and E. Shamboto Intelligent tool condition monitoring for milling, CIRP 29<sup>th</sup> Seminar on Manufacturing Systems pp 287-292, 1997
- 6.M. Milfelner and F. Cus, Simulation of cutting forces in ball-end milling, robotics and CIM, Vol 19(1/2), pp 99-106, 2000
7. F. Cus, M. Milfelner, J.Balic "Systems for cutting force monitoring and simulation in milling", Achievements in Mechanical and Materials Engineering, Vol 12, pp 175-178
8. F. Cus M Milfelner, J. Balic, "An overview of data acquisition system for cutting measuring and optimization in milling", Vol 13, pp 79-83.